


*EN13411-1 Compliant
Thimble in Stock!



XONTM

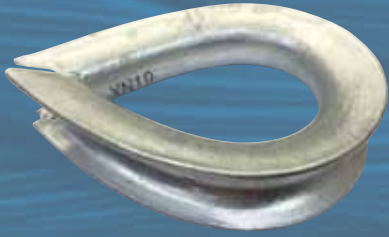

Wire Rope Accessories

Contents

Terms & Conditions

	Page Number
Talurit™ Swaging Products	03-04
Wire Rope Thimbles	05-07
Wire Rope Grips	08-09
Shackles	10-12
Turnbuckles	13-18
Eyebolts, Eyenuts & Pad Eyes	19-21
Snap Hooks & Quick Links	22-23
Miscellaneous	24-25
Hooks	26-27

Sale and Delivery Conditions: Orgalime S 2000 (Incoterms 2010).
Copy available on request.

Property right: Invoiced goods remain our property until payment
has been made in full to our account.

No unauthorised use or distribution of our intellectual property
without prior agreement.

Errors and omissions excepted.

We reserve the right to change technical data without prior notice.

Special requirements. Eg: Black Snap Hooks, prior notice must
be given to allow for adequate stocking.

We aim to despatch on a next day basis when orders are placed
before 3pm. Special Freight/Collection can be organised on
request.

Carriage paid UK Mainland £250.00.
Eire & Northern Ireland £750.00 (1000 euros).
Special freight will be charged at cost.

Orders placed after 3pm, if urgent please contact sales office.



Sailors Tongs

Part Code	Description	Presses Ferrule
SO52SM/TONG	SST1	1, 1.5, 2, 2.5, 3 & 3.5
SO52T4/4.5	SST2	4 & 4.5
SO52T5/6	SST3	5 & 6
SO52T6.5	SST6	6.5



D31 Hydraulic Swaging Tool

Includes Case

Part Code	Die Size
D-D31	Tool
D-D31-01	1
D-D31-015	1.5
D-D31-02	2
D-D31-025	2.5
D-D31-03	3
D-D31-035	3.5
D-D31-04	4
D-D31-045	4.5
D-D31-05	5
D-D31-06	6

Electric tool versions available on request



Mini XL Hand Crimper

Part Code	Description	Presses Ferrule
SO52SMTONG	XL	1, 1.5, 2 & 2.5



20T Press

Complete with Integral Hand Pump

Part Code	Description
SO5220TPHEAD	Mobile Type

Dies etc., please enquire.



40T Press

Complete with Hand Pump, Lifting Handle & Standard Base Plate

Part Code	Description
SO5240TPHEAD	Mobile Type

Powered versions available, Dies etc., please enquire



Special Clear Swaging Grease

For splicing applications



Part Code	Size
S21TALUGREASE	1 Litre
S21TALUGREASE5	5 Litre
S21TALUGREASE20	20 Litre



C7**C9****C12****C16**

FELCO Wire Rope Cutters

Part Code	Size
C07	C7
C09	C9
C12	C12
C16	C16

C3 Budget Wire Rope Cutter

Part Code	Size
S053CCO3	C3



Open Forged Carbon Steel Swage Sockets

Part Code	Size (inch)
S0330SS06	1/4
S0330SS08	5/16
S0330SS10	3/8
S0330SS11	7/16
S0330SS13	1/2
S0330SS14	9/16
S0330SS16	5/8
S0330SS19	3/4
S0330SS22	7/8
S0330SS26	1
S0330SS28	1.1/8
S0330SS32	1.1/4
S0330SS36	1.3/8
S0330SS40	1.1/2
S0330SS44	1.3/4
S0330SS52	2
S0330SS56	2.1/4
S0330SS60	2.1/2



Closed Forged Carbon Steel Swage Sockets

Part Code	Size (inch)
S033ESS06	1/4
S033ESS08	5/16
S033ESS10	3/8
S033ESS11	7/16
S033ESS13	1/2
S033ESS14	9/16
S033ESS16	5/8
S033ESS19	3/4
S033ESS22	7/8
S033ESS26	1
S033ESS28	1.1/8
S033ESS32	1.1/4
S033ESS36	1.3/8
S033ESS40	1.1/2
S033ESS44	1.3/4
S033ESS52	2
S033ESS56	2.1/4
S033ESS60	2.1/2



Wire Rope Slings Manufactured and Certified To EN13414-1 using a thimble eye.
Manufacturers MUST use a fully compliant EN13411-1 thimble.

EN13411-1 Thimbles

Hot Dipped Galvanised.

EN10204 certificates available on request (2.2 & 3.1).


Thimbles have batch number for traceability.

Width of groove must be a minimum 1.1x of wire rope diameter.

A minimum of 55% of wire rope diameter must be covered by groove depth.

(1) must be 2.5 to 3.5 x nominal diameter of wire rope


(2) must be 1.5 to 2 x dimension of (1). Base Angle ≤ 50 degree

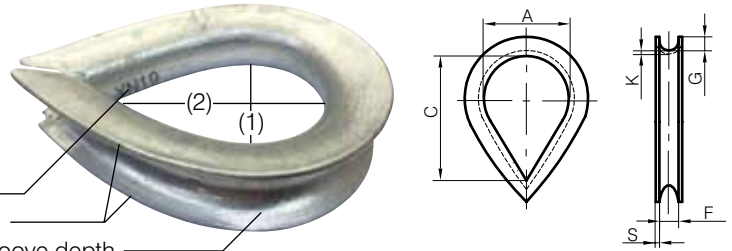

Part Code	Size (mm)	Weight (kg each)	A (mm)		C (mm)		F (mm)		G (mm)		K (mm)	S (mm)
			Min	Max	Min	Max	Min	Max	Min	Max		
XNTEN06	6	0.04	16	18	25	30	7	7.6	3.5	3.8	4	2
XNTEN08	8	0.06	21	24	33	40	8.8	9.5	4.4	4.7	4	2.3
XNTEN10	10	0.09	25	30	38	46	11	11.4	5.5	5.7	5	2.3
XNTEN11	11	0.12	28	33	42	56	12.7	13.3	6.2	6.6	5	2.5
XNTEN13	13	0.17	33	39	50	66	14.3	15.2	7.5	7.6	5.5	3
XNTEN16	16	0.28	41	48	62	80	17.6	19	8.8	9.5	8	3
XNTEN20	20	0.48	50	57	75	96	22	22.8	11	11.4	9	3.4
XNTEN22	22	0.63	56	66	84	110	24.5	26.6	12.3	13.3	10	4
XNTEN24	24	0.85	62	72	93	120	26.4	28.5	13.8	14.2	10	4
XNTEN26	26	0.96	66	75	106	126	28.6	30.4	14.3	15.2	10	4
XNTEN28	28	1.30	75	87	113	146	32	34.2	15.95	17.1	10.5	4
XNTEN32	32	1.61	90	105	136	160	35.5	38.1	17.6	19	11	4
XNTEN36	36	2.27	100	115	150	176	39.6	41.9	19.8	20.9	13.5	4.5
XNTEN38	38	3.20	110	125	160	190	42	45.7	21	22.8	15	4.5
XNTEN41	41	4.30	115	135	175	206	45.5	49.5	22.8	24.7	16	4.5
XNTEN44	44	6.30	120	140	180	220	50.8	53.3	24.8	26.6	19	4.5
XNTEN52	52	8.00	135	153	205	256	58	60.9	28.6	30.4	20	5.5

BS464 Type Thimbles


Hot Dipped Galvanised, Heart Shaped

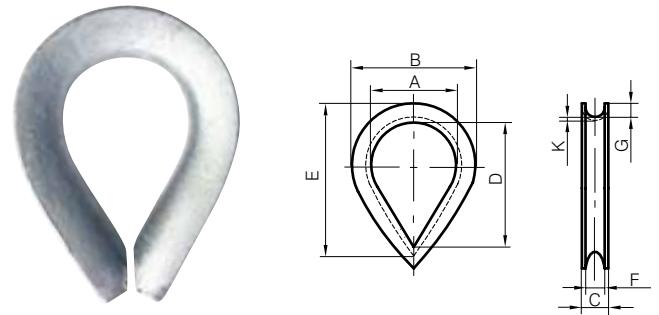

Part Code	Size (inch)	Weight (kg each)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	K (mm)
SO37006	1/4	0.03	20	34	10.5	30	48	6.5	3.5	3.5
SO37008	5/16	0.05	22.2	38	12.7	33.4	52	7.9	4	4
SO37010	3/8	0.07	25.4	47.6	14.3	38	64	10.3	6.3	4
SO37011	7/16	0.10	28.6	52	17.5	41.3	73	12.7	7.9	4.5
SO37013	1/2	0.13	31.7	58.8	20.6	44.5	79.4	14.3	7.9	5.5
SO37016	5/8	0.24	41.3	74.5	22.2	58.8	95.8	15.9	8.7	7.5
SO37019	3/4	0.43	50.8	92	28.6	73	124	20.6	11.1	8.3
SO37022	7/8	0.57	56	102	31.7	82.5	133	22.2	12.7	10
SO37026	1	0.84	69.8	119	35	108	162	27	14.3	10
SO37028	1-1/8	1.20	76.2	133	38	112	178	28.6	15.9	10
SO37032	1-1/4	1.30	95	152	41.3	133	197	33.4	15.9	10
SO37035	1-3/8	2.30	105	175	47.6	152	228	38	19	13.5
SO37038	1-1/2	3.20	114	197	52	165	254	41.3	23.8	13.5
SO37041	1-5/8	3.40	120	205	57	188	280	47	24	16
SO37044	1-3/4	5.20	127	228	56	178	286	50.8	25.4	19
SO37052	2	8.30	140	257	69.8	203	330	64	30.1	20

Type K2 Open Thimbles

Hot Dipped Galvanised, Heavy Duty Stub End Type

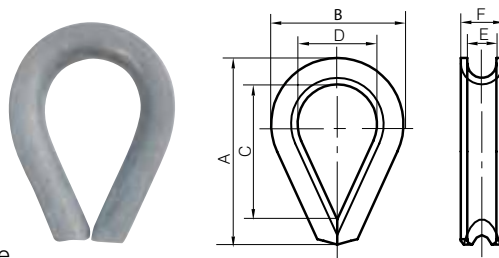


Part Code	Size (inch)	Weight (kg each)	Length A (inch)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
S037K215	2	7.90	12	225	240	140	52	65
S037K216	2-1/4	9.50	14	240	250	150	56	72
S037K217	2-1/2	18.00	17	290	340	180	72	88
S037K218	3	28.00	19	330	390	220	82	122
S037K219	3-1/2	36.30	22	375	460	240	92	132
S037K220	4	46.00	24	410	500	250	105	145
S037K221	5	55.00	26	450	540	280	130	170

Gusset Plate Only
Part Code

S037GPLATE01
S037GPLATE02
S037GPLATE03
S037GPLATE04
S037GPLATE05
S037GPLATE06
S037GPLATE07

Type K2-B Reinforced Thimbles with Gussett


Hot Dipped Galvanised, Heavy Duty Stub End Type



Part Code	Size (inch)	Weight (kg each)	Length A (inch)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
S037K2B01	2	8.90	12	225	140	140	52	16	65
S037K2B02	2-1/4	11.10	14	240	150	150	56	20	72
S037K2B03	2-1/2	18.90	17	290	185	180	72	20	88
S037K2B05	3	30.60	19	330	225	220	82	20	122
S037K2B06	3-1/2	39.00	22	375	280	240	92	20	132
S037K2B07	4	51.00	24	410	280	250	105	25	145
S037K2B08	5	63.50	26	450	280	280	130	30	170

DIN6899 Thimbles



Galvanised



Part Code	Size (mm)	Weight (kg per 100)	A (inch)	B (mm)	C (mm)	D (mm)
SO37689903	3	1	19	12	3	1.6
SO37689904	4	1	21	13	4	1.6
SO37689905	5	1	23	14	5	1.8
SO37689906	6	2	25	16	6	2.4
SO37689907	7	3	28	18	7	2.4
SO37689908	8	3	32	20	8	2.8
SO37689910	10	4	38	24	10	3.1
SO37689912	12	8	45	28	12	3.3

AISI 316 Stainless Steel Thimbles



Similar Pattern to DIN 6899



Part Code	Size (mm)	Weight (kg per 100)	A (inch)	B (mm)	C (mm)	D (mm)	E (mm)	Price Per 100
S037SS02	2	0.25	16	9	2.5	1	1.8	8.00
S037SS03	3	0.34	18	10	3.5	1	1.9	
S037SS04	4	0.58	19	11	5	1.2	2.8	
S037SS05	5	0.74	22	13	5.8	1.2	2.9	
S037SS06	6	1.35	28	15	6	1.5	3.5	
S037SS08	8	2.86	38	22	9	2	4	
S037SS10	10	5.70	48	27	12	2.5	5	
S037SS12	12	6.80	53	30	14	2.5	5.5	
S037SS14	14	10.50	57	34	16	3	6	
S037SS16	16	13.70	67	40	18	3	7	
S037SS18	18	23.40	75	45	20	4	8	
S037SS20	20	26.84	84	52	22	4	9	

Fed Spec Type Thimbles


Hot Dipped Galvanised, Heavy Duty Type. Meet Performance Requirements of Federal Specification FF-T27-276b Type



Part Code	Size (inch)	Size (mm)	Weight (kg each)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
S037US004	3/16	4	0.02	20	34	10.5	30	48	6.5	3.3	3.5
S037US006	1/4	6	0.03	22.2	38	12.7	33.4	52	8.5	4.4	4
S037US008	5/16	8	0.05	25.4	47.6	14.3	38	64	10.3	5.5	4.8
S037US010	3/8	10	0.10	28.6	52	17.5	41.3	73	12.7	6.05	4.8
S037US012	7/16	11	0.13	31.7	58.8	20.6	44.5	79.4	14.3	7.15	5.5
S037US013	1/2	13	0.22	41.3	74.5	22.2	58.8	95.8	16.9	8.8	7.9
S037US014	9/16	14	0.22	50.8	92	28.6	73	121	21.6	11	9.5
S037US016	5/8	16	0.32	56	102	31.7	82.5	131	22.8	12.1	9.5
S037US019	3/4	20	0.60	69.8	119	35	108	162	27	14.3	10.3
S037US022	7/8	22	0.88	76.2	133	38	112	178	29.6	15.95	12.7
S037US024	1	26	1.10	95	152	41.3	133	197	33.4	17.6	12.7
S037US028	1-1/8	31	1.55	105	175	47.6	152	228	38	19.8	15.6
S037US038	1-3/8	36	3.50	114	197	52	165	254	41.3	20.9	17.5
S037US039	1-1/2	38	5.00	114	197	58.6	165	25	42.9	22.55	17.5
S037US041	1-5/8	41	6.20	127	228	66.6	178	286	50.8	23	25.4
S037US044	1-3/4	44	7.20	140	257	69.8	203	330	64	28.6	28.6
S037US052	2	52	10.00	105	175	47.6	152	228	38	19.8	15.9
S037US057	2-1/4	57	19.00	114	197	52	165	254	41.3	20.9	17.5
S037US063	2-1/2	63	26.50	114	197	58.6	165	254	42.9	22.55	17.5
S037US070	2-3/4	70	28.80	127	228	66.6	178	286	50.8	23	25.4
S037US076	3	76	36.00	140	257	69.8	203	330	64	28.6	28.6

DIN741 Grips


Galvanised, Commercial Pattern



Part Code	Size (mm)	Weight (kg each)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
S03874103	3	0.01	9	10.5	10	M4	9.5	19.5	17
S03874105	5	0.01	11	11	12	M5	10	22.5	19
S038741065	6.5	0.02	13	12	14	M5	10.5	24	23
S03874108	8	0.03	15	14	19	M6	14	28	28
S03874110	10	0.06	18.5	18	20	M8	16	33	34
S03874113	13	0.11	23	22	30	M10	21	41	45
S03874114	14	0.12	23	22	30	M10	21.5	41	47
S03874116	16	0.19	29.5	25	33	M12	25	49	52
S03874119	19	0.23	32	28	38	M12	30	52	62
S03874122	22	0.34	37	33	44	M14	34	61	68
S03874126	26	0.39	41	34	46	M14	39	70	78
S03874130	30	0.60	46	36	51	M16	44	74	94
S03874134	34	0.73	52	40	55	M16	50.5	83	100
S03874140	40	0.91	58	44	60	M16	56	90	121
S03874144	45	1.43	65	52	70	M18	66	105	144
S03874150	50	1.46	65	52	70	M18	66	105	149

DIN1142 (EN13411-5-1) Grips


Galvanised





Part Code	Size (mm)	Weight (kg each)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
S038114205	5	0.02	12	13	13	M5	13	25	21
S0381142065	6.5	0.04	14	15	17	M6	14	30	27
S038114208	8	0.08	18	19	20	M8	19	38	34
S038114210	10	0.09	20	20	24	M8	20	40	39
S038114213	13	0.25	27	27	30	M12	30	54	53
S038114216	16	0.40	32	32	35	M14	35	64	64
S038114219	19	0.45	36	33	36	M14	39	69	70
S038114222	22	0.64	40	35	40	M16	44	76	81
S038114226	26	1.04	46	39	50	M20	51	85	92
S038114230	30	1.34	54	42	55	M20	61	96	110
S038114234	34	1.92	60	48	60	M22	68	107	119
S038114240	40	2.57	68	54	65	M24	78	121	134

US Fed Spec Heavy Duty Grips

Galvanised



Part Code	Size (inch)	Weight (kg each)	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	F (inch)	G (inch)	H (inch)
XNFSGRIP001	1/8	0.03	0.22	0.72	0.44	0.47	0.41	0.38	0.81	0.94
XNFSGRIP002	3/16	0.05	0.25	0.97	0.56	0.59	0.50	0.44	0.94	1.16
XNFSGRIP003	1/4	0.09	0.31	1.03	0.50	0.75	0.66	0.56	1.19	1.44
XNFSGRIP004	5/16	0.13	0.38	1.38	0.75	0.88	0.72	0.69	1.31	1.69
XNFSGRIP005	3/8	0.21	0.44	1.50	0.75	1.00	0.91	0.75	1.63	1.94
XNFSGRIP006	7/16	0.32	0.50	1.88	1.00	1.19	1.03	0.88	1.81	2.28
XNFSGRIP007	1/2	0.34	0.50	1.88	1.00	1.19	1.13	0.88	1.91	2.28
XNFSGRIP008	5/8	0.47	0.56	2.38	1.25	1.31	1.34	0.94	2.06	2.50
XNFSGRIP009	3/4	0.64	0.62	2.75	1.44	1.50	1.41	1.06	2.25	2.84
XNFSGRIP010	7/8	0.98	0.75	3.12	1.62	1.75	1.59	1.25	2.44	3.16
XNFSGRIP011	1	1.18	0.75	3.50	1.81	1.88	1.78	1.25	2.63	3.47
XNFSGRIP012	1-1/8	1.28	0.75	3.88	2.00	2.00	1.91	1.25	2.81	3.59
XNFSGRIP013	1-1/4	1.90	0.88	4.25	2.13	2.31	2.19	1.44	3.13	4.13
XNFSGRIP014	1-3/8	2.00	0.88	4.63	2.31	2.38	2.31	1.44	3.13	4.19
XNFSGRIP015	1-1/2	2.35	0.88	4.94	2.38	2.59	2.44	1.44	3.41	4.44
XNFSGRIP016	1-5/8	3.10	1.00	5.31	2.62	2.75	2.66	1.63	3.63	4.75
XNFSGRIP017	1-3/4	4.20	1.13	5.75	2.75	3.06	2.94	1.81	3.81	5.28
XNFSGRIP018	2	5.80	1.25	6.44	3.00	3.38	3.28	2.00	4.44	5.88
XNFSGRIP019	2-1/4	7.30	1.25	7.13	3.19	3.88	3.19	2.00	4.50	6.38
XNFSGRIP020	2-1/2	8.25	1.25	7.69	3.44	4.13	3.69	2.00	4.05	6.63
XNFSGRIP021	2-3/4	10.50	1.25	8.31	3.56	4.38	4.88	2.00	5.00	6.88
XNFSGRIP022	3	14.20	1.50	9.19	3.88	4.75	4.69	2.38	5.88	7.63
XNFSGRIP023	3-1/2	17.10	1.50	10.75	4.50	5.50	6.00	2.38	6.19	8.38



Simplex Clips

Galvanised

Part Code	Size (mm)	Weight (kg per 100)	L (mm)	M (mm)
XNSWC02MM	2	0.50	18.5	M4
XNSWC03MM	3	0.70	20	M4
XNSWC04MM	4	1.10	22.5	M5
XNSWC05MM	5	1.40	26	M5
XNSWC06MM	6	2.20	30	M6
XNSWC08MM	8	4.50	36	M8
XNSWC10MM	10	7.50	48	M10

Duplex Clips

Galvanised

Part Code	Size (mm)	Weight (kg per 100)	L (mm)	M (mm)
XNDW02MM	2	1.00	37	M4
XNDW03MM	3	1.40	40	M4
XNDW04MM	4	2.20	45	M5
XNDW05MM	5	2.80	52	M5
XNDW06MM	6	4.40	60	M6
XNDW08MM	8	9.00	72	M8
XNDW10MM	10	15.00	84	M10


Forged Screw Pin Bow Shackles

US Federal Specification Hot Dipped Galvanised

Safety Factor: 6:1

Drop Forged

Manufactured & Tested According to EN-13889 where applicable

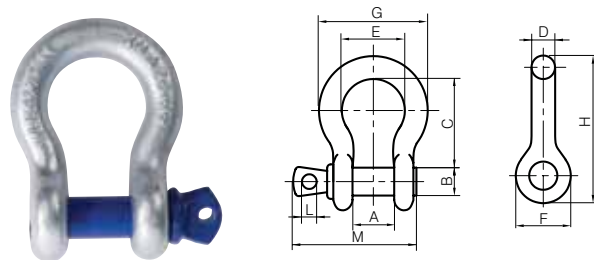

Part Code	Size D (inch)	Weight (kg each)	WLL (T)	A (inch)	B (inch)	C (inch)	E (inch)	F (inch)	G (inch)	H (inch)	L (inch)	M (inch)
XNSPAS01	3/16	0.03	1/3	0.38	0.25	0.88	0.60	0.56	0.98	1.47	0.16	1.12
XNSPAS02	1/4	0.05	0.5	0.47	0.31	1.13	0.78	0.61	1.28	1.84	0.19	1.38
XNSPAS03	5/16	0.08	0.75	0.53	0.38	1.22	0.84	0.75	1.47	2.09	0.22	1.66
XNSPAS04	3/8	0.14	1	0.66	0.44	1.44	1.03	0.91	1.78	2.49	0.25	2.03
XNSPAS05	7/16	0.20	1.5	0.75	0.50	1.69	1.16	1.06	2.03	2.91	0.31	2.38
XNSPAS06	1/2	0.32	2	0.81	0.63	1.88	1.31	1.19	2.31	3.28	0.38	2.69
XNSPAS07	5/8	0.62	3.25	1.06	0.75	2.38	1.69	1.50	2.94	4.19	0.44	3.34
XNSPAS08	3/4	1.03	4.75	1.25	0.88	2.81	2.00	1.81	3.50	4.97	0.50	3.97
XNSPAS09	7/8	1.66	6.5	1.44	1.00	3.31	2.28	2.09	4.03	5.83	0.50	4.50
XNSPAS10	1	2.31	8.5	1.69	1.13	3.75	2.69	2.38	4.69	6.56	0.56	5.07
XNSPAS11	1-1/8	3.42	9.5	1.81	1.25	4.25	2.91	2.69	5.16	7.47	0.63	5.59
XNSPAS12	1-1/4	4.56	12	2.03	1.38	4.69	3.25	3.00	5.75	8.25	0.69	6.16
XNSPAS13	1-3/8	6.35	13.5	2.25	1.50	5.25	3.63	3.31	6.38	9.16	0.75	6.84
XNSPAS14	1-1/2	8.15	17	2.38	1.63	5.75	3.88	3.63	6.88	10.00	0.81	7.35
XNSPAS15	1-3/4	14.70	25	2.88	2.00	7.00	5.00	4.19	8.86	12.34	1.00	9.08
XNSPAS16	2	20.41	35	3.25	2.25	7.75	5.75	4.81	9.97	13.68	1.22	10.34
XNSPAS17	2-1/2	39.00	55	4.13	2.75	10.50	7.25	5.69	12.87	17.84	1.38	13.00
XNSPAS18	3	60.00	85	5.00	3.30	13.00	7.88	6.50	16.42	21.50	1.54	15.66


Forged Screw Pin 'D' Shackles

US Federal Specification Hot Dipped Galvanised

Safety Factor: 6:1

Drop Forged

Manufactured & Tested According to EN-13889 where applicable

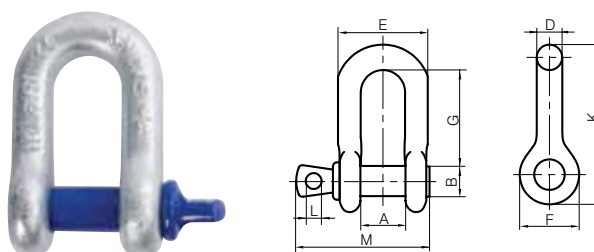

Part Code	Size D (inch)	Weight (kg each)	WLL (T)	A (inch)	B (inch)	E (inch)	F (inch)	G (inch)	K (inch)	L (inch)	M (inch)
XNSPDS01	3/16	0.03	1/3	0.38	0.25	0.79	0.56	0.72	1.22	0.16	1.07
XNSPDS02	1/4	0.05	0.5	0.47	0.31	0.97	0.62	0.97	1.59	0.19	1.43
XNSPDS03	5/16	0.07	0.75	0.53	0.38	1.15	0.75	1.07	1.91	0.22	1.71
XNSPDS04	3/8	0.13	1	0.66	0.44	1.42	0.92	1.28	2.31	0.25	2.02
XNSPDS05	7/16	0.19	1.5	0.75	0.50	1.63	1.06	1.48	2.67	0.31	2.37
XNSPDS06	1/2	0.28	2	0.81	0.63	1.81	1.18	1.66	3.03	0.38	2.69
XNSPDS07	5/8	0.54	3.25	1.06	0.75	2.32	1.50	2.04	3.76	0.44	3.34
XNSPDS08	3/4	0.92	4.75	1.25	0.88	2.75	1.81	2.40	4.53	0.50	3.97
XNSPDS09	7/8	1.41	6.5	1.44	1.00	3.20	2.10	2.86	5.33	0.50	4.50
XNSPDS10	1	2.14	8.5	1.69	1.13	3.69	2.38	3.24	5.94	0.56	5.13
XNSPDS11	1-1/8	3.06	9.5	1.81	1.25	4.07	2.69	3.61	6.78	0.63	5.71
XNSPDS12	1-1/4	4.30	12	2.03	1.38	4.53	3.00	3.97	7.50	0.69	6.25
XNSPDS13	1-3/8	5.65	13.5	2.25	1.50	5.01	3.31	4.43	8.28	0.75	6.83
XNSPDS14	1-1/2	7.20	17	2.38	1.63	5.38	3.62	4.84	9.05	0.81	7.33
XNSPDS15	1-3/4	12.15	25	2.88	2.00	6.38	4.19	5.78	10.97	1.00	9.06
XNSPDS16	2	19.19	35	3.25	2.25	7.25	5.00	6.77	12.74	1.22	10.35
XNSPDS17	2-1/2	33.00	55	4.12	2.75	9.38	5.68	8.07	14.85	1.38	13.00
XNSPDS18	3	50.00	85	5.00	3.30	11.00	6.50	8.56	16.87	1.54	15.66


Forged Safety Pin Bow Shackles

US Federal Specification Hot Dipped Galvanised

Safety Factor: 6:1

Drop Forged

Manufactured & Tested According to EN-13889 where applicable

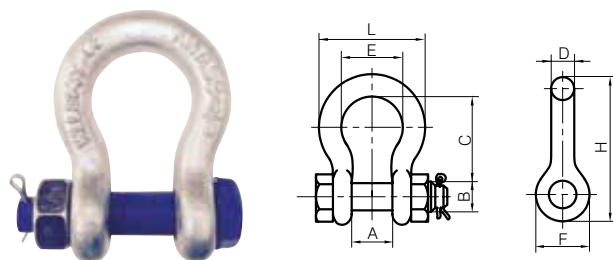

Part Code	Size D (inch)	Weight (kg each)	WLL (T)	A (inch)	B (inch)	C (inch)	E (inch)	F (inch)	H (inch)	L (inch)
XNSBAS01	3/16	0.03	1/3	0.38	0.25	0.88	0.60	0.56	1.47	0.98
XNSBAS02	1/4	0.05	0.5	0.47	0.31	1.13	0.78	0.61	1.84	1.28
XNSBAS03	5/16	0.09	0.75	0.53	0.38	1.22	0.84	0.75	2.09	1.47
XNSBAS04	3/8	0.17	1	0.66	0.44	1.44	1.03	0.91	2.49	1.78
XNSBAS05	7/16	0.22	1.5	0.75	0.50	1.69	1.16	1.06	2.91	2.03
XNSBAS06	1/2	0.36	2	0.81	0.64	1.88	1.31	1.19	3.28	2.31
XNSBAS07	5/8	0.72	3.25	1.06	0.77	2.38	1.69	1.50	4.19	2.94
XNSBAS08	3/4	1.14	4.75	1.25	0.89	2.81	2.00	1.81	4.97	3.50
XNSBAS09	7/8	1.77	6.5	1.44	1.02	3.31	2.28	2.09	5.83	4.03
XNSBAS10	1	2.57	8.5	1.69	1.15	3.75	2.69	2.38	6.56	4.69
XNSBAS11	1-1/8	3.74	9.5	1.81	1.25	4.25	2.91	2.69	7.47	5.16
XNSBAS12	1-1/4	4.76	12	2.03	1.40	4.69	3.25	3.00	8.25	5.75
XNSBAS13	1-3/8	6.90	13.5	2.25	1.53	5.25	3.63	3.31	9.16	6.38
XNSBAS14	1-1/2	8.70	17	2.38	1.66	5.75	3.88	3.63	10.00	6.88
XNSBAS15	1-3/4	15.60	25	2.88	2.04	7.00	5.00	4.19	12.34	8.86
XNSBAS16	2	23.70	35	3.25	2.30	7.75	5.75	4.81	13.68	9.97
XNSBAS17	2-1/2	42.50	55	4.13	2.80	10.50	7.25	5.69	17.84	12.87
XNSBAS18	3	66.00	85	5.00	3.30	13.00	7.88	6.50	21.50	16.42


Forged Safety Pin 'D' Shackles

US Federal Specification Hot Dipped Galvanised

Safety Factor: 6:1

Drop Forged

Manufactured & Tested According to EN-13889 where applicable

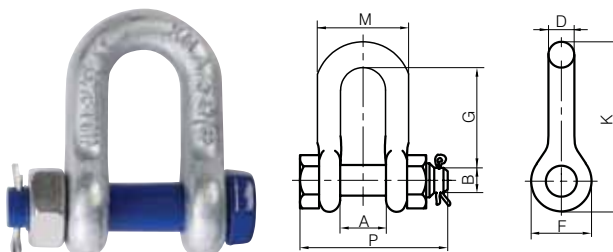


Part Code	Size D (inch)	Weight (kg each)	WLL (T)	A (inch)	B (inch)	F (inch)	G (inch)	K (inch)	M (inch)	P (inch)
XNSBDS01	3/16	0.03	1/3	0.38	0.25	0.56	0.72	1.22	0.79	1.20
XNSBDS02	1/4	0.05	0.5	0.47	0.31	0.62	0.97	1.59	0.97	1.56
XNSBDS03	5/16	0.09	0.75	0.53	0.38	0.75	1.07	1.91	1.15	1.82
XNSBDS04	3/8	0.14	1	0.66	0.44	0.92	1.28	2.31	1.42	2.17
XNSBDS05	7/16	0.22	1.5	0.75	0.50	1.06	1.48	2.67	1.63	2.52
XNSBDS06	1/2	0.33	2	0.81	0.64	1.18	1.66	3.03	1.81	2.80
XNSBDS07	5/8	0.64	3.25	1.06	0.77	1.50	2.04	3.76	2.32	3.56
XNSBDS08	3/4	1.02	4.75	1.25	0.89	1.81	2.40	4.53	2.75	4.15
XNSBDS09	7/8	1.64	6.5	1.44	1.02	2.10	2.86	5.33	3.20	4.82
XNSBDS10	1	2.38	8.5	1.69	1.15	2.38	3.24	5.94	3.69	5.39
XNSBDS11	1-1/8	3.34	9.5	1.81	1.25	2.69	3.61	6.78	4.07	5.90
XNSBDS12	1-1/4	4.50	12	2.03	1.40	3.00	3.97	7.50	4.53	6.69
XNSBDS13	1-3/8	6.60	13.5	2.25	1.53	3.31	4.43	8.28	5.01	7.21
XNSBDS14	1-1/2	7.80	17	2.38	1.66	3.62	4.87	9.05	5.38	7.73
XNSBDS15	1-3/4	13.00	25	2.88	2.04	4.19	5.82	10.97	6.38	9.33
XNSBDS16	2	21.20	35	3.25	2.30	5.00	6.82	12.74	7.25	10.41
XNSBDS17	2-1/2	38.50	55	4.13	2.80	5.68	8.07	14.85	9.38	13.58
XNSBDS18	3	56.00	85	5.00	3.25	6.50	8.56	16.87	11.00	15.13

Commercial 'D' Shackles

Galvanised


Part Code	Size D (mm)	Weight (kg each)	A (mm)	B (mm)	C (mm)
XNCDS05MM	5	0.01	20	10	10
XNCDS06MM	6	0.02	24	12	12
XNCDS08MM	8	0.05	32	16	16
XNCDS10MM	10	0.09	40	20	20
XNCDS11MM	11	0.14	44	22	22
XNCDS12MM	12	0.18	48	24	24
XNCDS14MM	14	0.29	56	28	28
XNCDS16MM	16	0.43	64	32	32
XNCDS20MM	20	0.78	76	40	40
XNCDS22MM	22	1.15	88	44	44
XNCDS25MM	25	1.80	100	50	50
XNCDS28MM	28	2.36	112	56	56
XNCDS32MM	32	3.60	128	64	64
XNCDS38MM	38	6.20	152	76	76

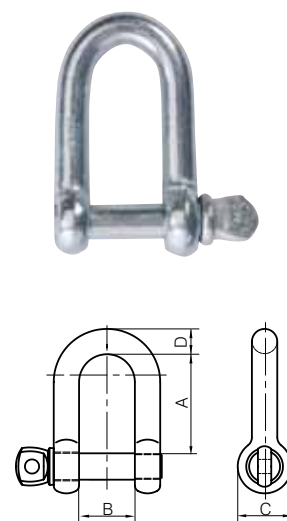


Commercial Bow Shackles

Galvanised

Part Code	Size D (mm)	Weight (kg each)	A (mm)	B (mm)	C (mm)	E (mm)
XNCBS05MM	5	0.02	20	10	10	15
XNCBS06MM	6	0.03	24	12	12	18
XNCBS08MM	8	0.05	32	16	16	24
XNCBS10MM	10	0.10	40	20	20	30
XNCBS11MM	11	0.15	44	22	22	34
XNCBS12MM	12	0.19	48	24	24	36
XNCBS14MM	14	0.30	56	28	28	42
XNCBS16MM	16	0.47	64	32	32	48
XNCBS20MM	20	0.85	76	40	40	60
XNCBS22MM	22	1.20	88	44	44	66
XNCBS25MM	25	1.90	100	50	50	75
XNCBS28MM	28	2.50	112	56	56	84
XNCBS32MM	32	3.70	128	64	64	96
XNCBS38MM	38	6.60	152	76	76	118

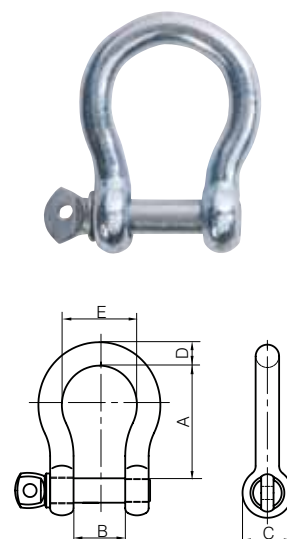

Chain 'D' Shackle

Grade 80 Bolt Type
Safety factor 4:1


Part Code	Size (mm)	Weight (kg)	WLL (T)	A (mm)	B (mm)	C (mm)	D (mm)	L (mm)
XN049-07/8	7/8	0.11	2	15	34	9	10	56
XN049-10	10	0.22	3.2	21	45	11.5	12	71
XN049-13	13	0.38	5	25	54	14.5	16	91
XN049-16	16	0.73	8	30	66	17.5	20	111



Forged Eye/Eye Turnbuckles

US Federal Specification, Hot Dipped Galvanised
Complete with Fitted Lock Nuts
Safety Factor: 5:1

B=OPEN
C=CLOSED
D=OPEN
E=CLOSED
H=CLOSED

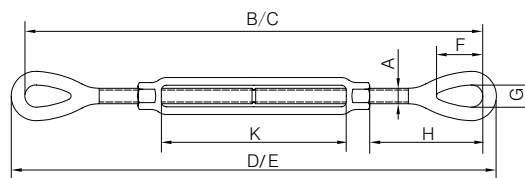

Part Code	Size (inch)	Weight (kg each)	WLL (T)	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	F (inch)	G (inch)	H (inch)	K (inch)
XNTBEE01	1/4 x 4	0.11	0.23	0.25	11.8	7.8	12.25	8.25	0.78	0.34	1.75	4
XNTBEE02	5/16 x 4-1/2	0.20	0.36	0.31	13.56	9.06	14.12	9.62	0.94	0.44	2.09	4.5
XNTBEE03	3/8 x 6	0.34	0.54	0.38	17.47	11.47	18.16	12.16	1.12	0.53	2.52	6
XNTBEE04	1/2 x 6	0.69	1	0.5	20.08	13.08	20.96	13.96	1.44	0.72	3.23	6
XNTBEE05	1/2 x 9	0.76	1	0.5	26.08	16.08	26.96	16.96	1.44	0.72	3.23	9
XNTBEE06	1/2 x 12	0.97	1	0.5	32.08	19.08	32.96	19.96	1.44	0.72	3.23	12
XNTBEE07	5/8 x 6	1.08	1.6	0.63	21.93	14.68	22.93	15.68	1.75	0.88	3.9	6
XNTBEE08	5/8 x 9	1.27	1.6	0.63	27.93	17.68	28.93	18.68	1.75	0.88	3.9	9
XNTBEE09	5/8 x 12	1.55	1.6	0.63	33.93	20.68	34.93	21.68	1.75	0.88	3.9	12
XNTBEE10	5/8 x 18	2.10	1.6	0.63	39.93	23.68	40.93	24.68	1.75	0.88	3.9	18
XNTBEE11	3/4 x 6	1.72	2.3	0.75	23.88	16.38	25.12	17.62	2.09	1	4.69	6
XNTBEE12	3/4 x 9	1.95	2.3	0.75	29.83	19.38	31.12	20.62	2.09	1	4.69	12
XNTBEE13	3/4 x 12	2.49	2.3	0.75	35.88	22.38	37.12	23.62	2.09	1	4.69	12
XNTBEE14	3/4 x 18	3.26	2.3	0.75	47.88	28.38	49.12	29.62	2.09	1	4.69	18
XNTBEE15	7/8 x 12	3.30	3.2	0.88	37.07	28.32	38.57	24.82	2.38	1.25	5.1	12
XNTBEE16	7/8 x 18	4.52	3.2	0.88	49.07	29.32	50.57	30.82	2.38	1.25	5.1	18
XNTBEE17	1 x 6	4.10	4.5	1	27.97	19.97	29.72	21.72	3	1.44	6.36	6
XNTBEE18	1 x 12	5.22	4.5	1	39.97	25.97	41.97	27.72	3	1.44	6.36	12
XNTBEE19	1 x 18	6.36	4.5	1	51.97	31.97	53.72	33.72	3	1.44	6.36	18
XNTBEE20	1 x 24	7.83	4.5	1	63.97	37.97	65.72	39.72	3	1.44	6.36	24
XNTBEE21	1-1/4 x 12	8.63	6.9	1.25	42.81	28.31	45.06	30.56	3.56	1.81	7.72	12
XNTBEE22	1-1/4 x 18	10.44	6.9	1.25	54.81	34.31	57.06	36.56	3.56	1.81	7.72	18
XNTBEE23	1-1/4 x 24	12.26	6.9	1.25	66.81	40.31	69.06	42.56	3.56	1.81	7.72	24
XNTBEE24	1-1/2 x 12	12.48	9.7	1.5	45.5	30.5	48	33	4.06	2.21	8.62	12
XNTBEE25	1-1/2 x 18	14.00	9.7	1.5	57.5	36.5	60	39	4.06	2.21	8.62	18
XNTBEE26	1-1/2 x 24	17.00	9.7	1.5	69.5	42.5	72	45	4.06	2.21	8.62	24
XNTBEE27	1-3/4 x 18	23.80	12.7	1.75	57.38	39.38	60.38	42.38	4.62	2.38	10	18
XNTBEE28	1-3/4 x 24	26.33	12.7	1.75	69.38	45.38	72.38	48.38	4.62	2.38	10	24
XNTBEE29	2 x 24	38.70	16.8	2	75.69	51.69	79.19	55.19	5.75	2.69	13.09	24
XNTBEE30	2-1/2 x 24	65.50	27	2.5	78.62	54.62	82.62	58.62	6.5	3.12	13.78	24
XNTBEE31	2-3/4 x 24	88.00	34	2.75	81	57	85.5	61.5	7	3.25	15.22	24

Typical Markings






Forged Jaw/Jaw Turnbuckles

US Federal Specification, Hot Dipped Galvanised
Complete with Fitted Lock Nuts
Safety Factor: 5:1

E=OPEN
F=CLOSED
M=OPEN
N=CLOSED
C=CLOSED

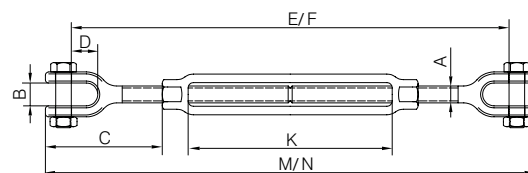


Part Code	Size (inch)	Weight (kg each)	WLL (T)	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	F (inch)	M (inch)	N (inch)	K (inch)
XNTBJJ01	1/4 x 4	0.16	0.23	0.25	0.45	1.58	0.62	10.9	6.9	11.9	7.9	4
XNTBJJ02	5/16 x 4-1/2	0.24	0.36	0.31	0.5	1.98	0.87	12.36	8.36	13.9	9.4	4.5
XNTBJJ03	3/8 x 6	0.36	0.54	0.38	0.54	2.21	0.87	16.14	10.14	17.38	11.3	6
XNTBJJ04	1/2 x 6	0.71	1	0.5	0.65	2.75	1.06	18.5	11.5	20	813	6
XNTBJJ05	1/2 x 9	0.79	1	0.5	0.65	2.75	1.06	24.5	14.5	26	19	9
XNTBJJ06	1/2 x 12	1.09	1	0.5	0.65	2.75	1.06	30.5	17.5	32	19	12
XNTBJJ07	5/8 x 6	1.23	1.6	0.63	0.79	3.5	1.31	20.05	12.8	22.13	14.88	6
XNTBJJ08	5/8 x 9	1.55	1.6	0.63	0.79	3.5	1.31	26.05	15.8	28.13	17.88	9
XNTBJJ09	5/8 x 12	1.77	1.6	0.63	0.79	3.5	1.31	32.05	18.8	34.13	20.88	12
XNTBJJ10	5/8 x 18	2.30	1.6	0.63	0.79	3.5	1.31	38.05	21.8	40.13	23.88	18
XNTBJJ11	3/4 x 6	1.87	2.3	0.75	0.94	4.18	1.5	21.5	14	24.1	16.6	6
XNTBJJ12	3/4 x 9	2.47	2.3	0.75	0.94	4.18	1.5	27.5	17	30.1	19.6	9
XNTBJJ13	3/4 x 12	2.97	2.3	0.75	0.94	4.18	1.5	33.5	20	36.1	22.6	12
XNTBJJ14	3/4 x 18	3.64	2.3	0.75	0.94	4.18	1.5	45.5	26	48.1	28.6	18
XNTBJJ15	7/8 x 12	3.71	3.2	0.88	1.13	4.85	1.75	35.11	21.36	38.07	24.35	12
XNTBJJ16	7/8 x 18	4.89	3.2	0.88	1.13	4.85	1.75	47.11	27.36	50.07	30.32	18
XNTBJJ17	1 x 6	4.62	4.5	1	1.34	5.53	2.06	24.72	16.72	28.06	20.06	6
XNTBJJ18	1 x 12	5.96	4.5	1	1.34	5.53	2.06	36.72	22.72	40.06	26.06	12
XNTBJJ19	1 x 18	6.87	4.5	1	1.34	5.53	2.06	48.72	28.72	52.06	32.06	18
XNTBJJ20	1 x 24	8.20	4.5	1	1.34	5.53	2.06	60.72	34.72	64.06	38.06	24
XNTBJJ21	1-1/4 x 12	9.34	6.9	1.25	1.75	7.21	2.81	39.84	25.34	44.04	29.54	12
XNTBJJ22	1-1/4 x 18	11.20	6.9	1.25	1.75	7.21	2.81	51.84	41.34	56.04	35.54	18
XNTBJJ23	1-1/4 x 24	12.28	6.9	1.25	1.75	7.21	2.81	63.84	37.34	68.04	41.54	24
XNTBJJ24	1-1/2 x 12	13.93	9.7	1.5	2.06	7.88	2.81	41.5	26.5	46.5	31.5	12
XNTBJJ25	1-1/2 x 18	16.68	9.7	1.5	2.06	7.88	2.81	53.5	32.5	58.5	37.5	18
XNTBJJ26	1-1/2 x 24	18.89	9.7	1.5	2.06	7.88	2.81	65.5	38.5	70.5	43.5	24
XNTBJJ27	1-3/4 x 18	24.52	12.7	1.75	2.6	9.4	3.38	53.38	35.38	59.18	41.18	18
XNTBJJ28	1-3/4 x 24	28.77	12.7	1.75	2.6	9.4	3.38	65.38	41.38	71.18	47.18	24
XNTBJJ29	2 x 24	42.79	16.8	2	2.62	11.86	3.69	69.54	45.54	76.72	52.72	24
XNTBJJ30	2-1/2 x 24	74.90	27	2.5	3.01	13.56	4.44	72.98	48.98	82.18	58.18	24
XNTBJJ31	2-3/4 x 24	88.89	34	2.75	3.61	15.22	4.19	74.75	50.75	85.5	61.5	24

Forged Jaw/Eye Turnbuckles

US Federal Specification, Hot Dipped Galvanised
Complete with Fitted Lock Nuts
Safety Factor: 5:1

B=OPEN
C=CLOSED
M=OPEN
N=CLOSED
E=CLOSED
H=CLOSED

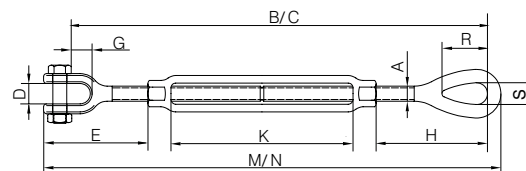


Part Code	Size (inch)	Weight (kg each)	WLL (T)	A (inch)	D (inch)	E (inch)	G (inch)	B (inch)	C (inch)	M (inch)	N (inch)	R (inch)	S (inch)	H (inch)	K (inch)
XNTBJE01	1/4 x 4	0.13	0.23	0.25	0.45	1.58	0.62	11.35	7.35	12.07	8.07	0.78	0.34	1.75	4
XNTBJE02	5/16 x 4-1/2	0.23	0.36	0.31	0.5	1.98	0.87	13.71	8.71	14.01	9.51	0.94	0.44	2.09	4.5
XNTBJE03	3/8 x 6	0.36	0.54	0.38	0.54	2.21	0.87	16.81	10.81	17.77	11.77	1.12	0.53	2.52	6
XNTBJE04	1/2 x 6	0.69	1	0.5	0.65	2.75	1.06	19.29	12.29	20.48	13.48	1.44	0.72	3.23	6
XNTBJE05	1/2 x 9	0.77	1	0.5	0.65	2.75	1.06	25.29	15.29	26.48	16.48	1.44	0.72	3.23	9
XNTBJE06	1/2 x 12	0.94	1	0.5	0.65	2.75	1.06	31.29	18.29	32.48	19.48	1.44	0.72	3.23	12
XNTBJE07	5/8 x 6	1.07	1.6	0.63	0.79	3.5	1.31	20.99	13.74	22.53	15.28	1.75	0.88	3.9	6
XNTBJE08	5/8 x 9	1.44	1.6	0.63	0.79	3.5	1.31	26.99	16.74	28.53	18.28	1.75	0.88	3.9	9
XNTBJE09	5/8 x 12	1.64	1.6	0.63	0.79	3.5	1.31	32.99	19.74	34.53	21.28	1.75	0.88	3.9	12
XNTBJE10	5/8 x 18	2.30	1.6	0.63	0.79	3.5	1.31	38.99	22.74	40.53	24.28	1.75	0.88	3.9	18
XNTBJE11	3/4 x 6	1.81	2.3	0.75	0.94	4.18	1.5	22.69	11.19	24.61	17.11	2.09	1	4.69	6
XNTBJE12	3/4 x 9	2.16	2.3	0.75	0.94	4.18	1.5	28.69	18.19	30.61	20.11	2.09	1	4.69	9
XNTBJE13	3/4 x 12	2.69	2.3	0.75	0.94	4.18	1.5	34.69	21.19	36.61	23.11	2.09	1	4.69	12
XNTBJE14	3/4 x 18	3.20	2.3	0.75	0.94	4.18	1.5	46.69	27.19	48.61	29.11	2.09	1	4.69	18
XNTBJE15	7/8 x 12	3.79	3.2	0.88	1.13	4.85	1.75	36.09	22.34	38.32	24.57	2.38	1.25	5.1	12
XNTBJE16	7/8 x 18	4.43	3.2	0.88	1.13	4.85	1.75	48.09	28.34	50.32	30.57	2.38	1.25	5.1	18
XNTBJE17	1 x 6	4.05	4.5	1	1.34	5.53	2.06	26.34	18.34	28.89	20.89	3	1.44	6.36	6
XNTBJE18	1 x 12	5.08	4.5	1	1.34	5.53	2.06	38.34	24.34	40.89	26.89	3	1.44	6.36	12
XNTBJE19	1 x 18	6.04	4.5	1	1.34	5.53	2.06	50.34	30.34	52.89	32.89	3	1.44	6.36	18
XNTBJE20	1 x 24	7.71	4.5	1	1.34	5.53	2.06	62.34	36.34	64.89	38.89	3	1.44	6.36	24
XNTBJE21	1-1/4 x 12	8.82	6.9	1.25	1.75	7.21	2.81	41.32	26.82	44.55	30.05	3.56	1.81	7.72	12
XNTBJE22	1-1/4 x 18	10.97	6.9	1.25	1.75	7.21	2.81	53.32	32.82	56.05	36.05	3.56	1.81	7.72	18
XNTBJE23	1-1/4 x 24	12.84	6.9	1.25	1.75	7.21	2.81	63.32	38.82	68.55	42.05	3.56	1.81	7.72	24
XNTBJE24	1-1/2 x 12	13.16	9.7	1.5	2.06	7.88	2.81	43.5	28.5	47.25	32.25	4.06	2.21	8.62	12
XNTBJE25	1-1/2 x 18	15.89	9.7	1.5	2.06	7.88	2.81	55.5	34.5	59.25	38.25	4.06	2.21	8.62	18
XNTBJE26	1-1/2 x 24	17.79	9.7	1.5	2.06	7.88	2.81	67.5	40.5	71.25	44.25	4.06	2.21	8.62	24
XNTBJE27	1-3/4 x 18	24.40	12.7	1.75	2.6	9.4	3.38	55.38	37.38	59.78	41.78	4.62	2.38	10	18
XNTBJE28	1-3/4 x 24	27.55	12.7	1.75	2.6	9.4	3.38	67.38	43.38	71.78	47.75	4.62	2.38	10	24
XNTBJE29	2 x 24	40.41	16.8	2	2.62	11.86	3.69	72.62	48.62	77.95	53.95	5.75	2.69	13.09	24
XNTBJE30	2-1/2 x 24	78.00	27	2.5	3.01	13.56	4.44	75.8	51.8	82.4	58.4	6.5	3.12	13.78	24
XNTBJE31	2-3/4 x 24	82.00	34	2.75	3.61	15.22	4.19	77.88	53.88	85.5	61.5	7	3.25	15.22	24



Forged Hook/Hook Turnbuckles

US Federal Specification, Hot Dipped Galvanised
Complete with Fitted Lock Nuts
Safety Factor: 5:1

B=OPEN
C=CLOSED
M=OPEN
N=CLOSED
E=CLOSED

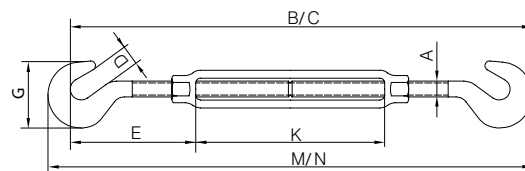


Part Code	Size (inch)	Weight (kg each)	WLL (T)	A (inch)	D (inch)	E (inch)	G (inch)	B (inch)	C (inch)	M (inch)	N (inch)	K (inch)
XNTBHH03	3/8 x 6	0.35	0.45	0.38	0.56	2.3	1.77	16.5	10.5	17.72	17.72	6
XNTBHH04	1/2 x 6	0.72	0.7	0.5	0.66	2.94	2.28	18.82	11.82	20.38	13.38	6
XNTBHH05	1/2 x 9	0.82	0.7	0.5	0.66	2.94	2.28	24.82	14.82	26.38	16.38	9
XNTBHH06	1/2 x 12	1.03	0.7	0.5	0.66	2.94	2.28	30.82	17.82	32.38	19.38	12
XNTBHH07	5/8 x 6	1.25	1	0.63	0.9	3.69	2.81	20.5	13.25	22.5	15.25	6
XNTBHH08	5/8 x 9	1.55	1	0.63	0.9	3.69	2.81	26.5	16.25	28.5	18.25	9
XNTBHH09	5/8 x 12	1.72	1	0.63	0.9	3.69	2.81	32.5	19.25	34.5	21.25	12
XNTBHH10	5/8 x 18	2.20	1	0.63	0.9	3.69	2.81	38.5	22.25	40.5	24.25	18
XNTBHH11	3/4 x 6	1.76	1.3	0.75	0.98	4.52	3.33	22.38	14.88	24.78	17.28	6
XNTBHH12	3/4 x 9	2.39	1.3	0.75	0.98	4.52	3.33	28.38	17.88	30.78	20.28	9
XNTBHH13	3/4 x 12	2.47	1.3	0.75	0.98	4.52	3.33	34.38	20.88	36.78	23.28	12
XNTBHH14	3/4 x 18	3.68	1.3	0.75	0.98	4.52	3.33	46.38	26.88	48.78	29.28	18
XNTBHH15	7/8 x 12	3.67	1.8	0.88	1.13	5.19	3.78	36	22.25	38.75	25	12
XNTBHH16	7/8 x 18	4.52	1.8	0.88	1.13	5.19	3.78	48	28.25	50.75	21	18
XNTBHH17	1 x 6	4.24	2.3	1	1.25	5.84	4.25	25.63	17.63	34.69	20.69	6
XNTBHH18	1 x 12	5.42	2.3	1	1.25	5.84	4.25	37.63	23.63	40.69	26.69	12
XNTBHH19	1 x 18	6.36	2.3	1	1.25	5.84	4.25	49.63	29.63	52.69	32.69	18



Forged Hook/Eye Turnbuckles

US Federal Specification, Hot Dipped Galvanised
Complete with Fitted Lock Nuts
Safety Factor: 5:1

B=OPEN
C=CLOSED
M=OPEN
N=CLOSED
E=CLOSED

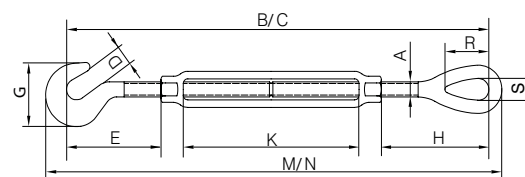



Part Code	Size (inch)	Weight (kg each)	WLL (T)	A (inch)	D (inch)	E (inch)	G (inch)	B (inch)	C (inch)	M (inch)	N (inch)	R (inch)	S (inch)	H (inch)	K (inch)
XNTBHE03	3/8 x 6	0.35	0.45	0.38	0.56	2.3	1.77	16.98	10.98	17.94	11.94	1.12	0.53	2.52	6
XNTBHE04	1/2 x 6	0.73	0.7	0.5	0.66	2.94	2.28	19.45	12.45	20.67	13.67	1.44	0.72	3.23	6
XNTBHE05	1/2 x 9	0.84	0.7	0.5	0.66	2.94	2.28	25.45	12.45	20.67	16.67	1.44	0.72	3.23	9
XNTBHE06	1/2 x 12	1.02	0.7	0.5	0.66	2.94	2.28	31.45	18.45	32.67	19.67	1.44	0.72	3.23	12
XNTBHE07	5/8 x 6	1.23	1	0.63	0.9	3.69	2.81	21.96	13.96	22.72	15.47	1.75	0.88	3.9	6
XNTBHE08	5/8 x 9	1.42	1	0.63	0.9	3.69	2.81	27.96	16.96	28.72	18.47	1.75	0.88	3.9	9
XNTBHE09	5/8 x 12	1.72	1	0.63	0.9	3.69	2.81	33.21	19.96	34.72	21.47	1.75	0.88	3.9	12
XNTBHE10	5/8 x 18	2.10	1	0.63	0.9	3.69	2.81	39.21	22.96	40.72	24.47	1.75	0.88	3.9	18
XNTBHE11	3/4 x 6	1.77	1.3	0.75	0.98	4.52	3.33	23.13	15.63	24.95	17.45	2.09	1	4.69	6
XNTBHE12	3/4 x 9	2.10	1.3	0.75	0.98	4.52	3.33	29.13	18.63	30.96	20.45	2.09	1	4.69	9
XNTBHE13	3/4 x 12	2.65	1.3	0.75	0.98	4.52	3.33	35.13	21.63	36.95	23.45	2.09	1	4.69	12
XNTBHE14	3/4 x 18	2.87	1.3	0.75	0.98	4.52	3.33	47.13	27.63	48.95	29.45	2.09	1	4.69	18
XNTBHE15	7/8 x 12	3.67	1.8	0.88	1.13	5.19	3.78	36.53	22.78	38.66	24.91	2.38	1.25	5.1	12
XNTBHE16	7/8 x 18	4.51	1.8	0.88	1.13	5.19	3.78	48.53	28.78	50.66	30.91	2.38	1.25	5.1	18
XNTBHE18	1 x 12	5.42	2.3	1	1.25	5.84	4.25	38.8	24.8	41.2	27.2	3	1.44	6.36	12
XNTBHE19	1 x 18	6.35	2.3	1	1.25	5.84	4.25	50.8	30.8	53.2	33.2	3	1.44	6.36	18

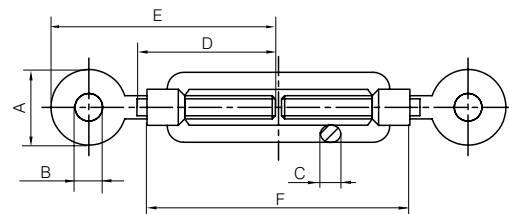

DIN1480 Eye/Eye Turnbuckles

Galvanised, Complete with Fitted Lock Nuts



Part Code	Size	Weight (kg each)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
XN1480E/EM05	M5	0.05	15	8	5	35	58	70
XN1480E/EM06	M6	0.09	19	9	6	55	80	110
XN1480E/EM08	M8	0.17	2	11	8	55	84	110
XN1480E/EM10	M10	0.29	31	15	9	63	105	125
XN1480E/EM12	M12	0.43	35	17	11	68	115	125
XN1480E/EM16	M16	0.92	48	22	14	85	150	170
XN1480E/EM20	M20	1.69	52	24	17	100	163	200
XN1480E/EM22	M22	2.17	60	27	19	110	185	220
XN1480E/EM24	M24	2.83	66	27	21	128	205	255
XN1480E/EM30	M30	4.80	71	31	23	128	230	255
XN1480E/EM36	M36	7.65	95	43	28	148	270	295

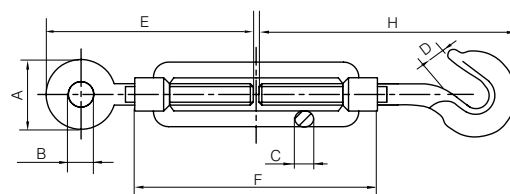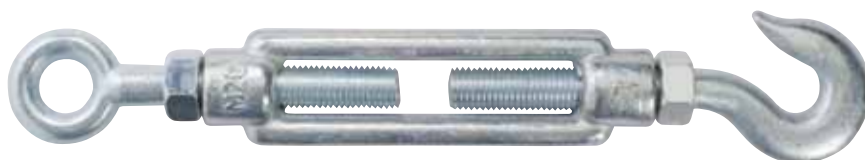

DIN1480 Hook/Eye Turnbuckles

Galvanised, Complete with Fitted Lock Nuts

Part Code	Size	Weight (kg each)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
XN1480H/EM05	M5	0.05	15	8	5	7	58	70
XN1480H/EM06	M6	0.09	19	9	6	8.5	80	110
XN1480H/EM08	M8	0.17	2	11	8	11	84	110
XN1480H/EM10	M10	0.29	31	15	9	13.5	105	125
XN1480H/EM12	M12	0.43	35	17	11	15.5	115	125
XN1480H/EM16	M16	0.92	48	22	14	20	150	10
XN1480H/EM20	M20	1.69	52	24	17	21.5	163	200
XN1480H/EM22	M22	2.17	60	27	19	26	185	220
XN1480H/EM24	M24	2.83	66	27	21	26	205	255
XN1480H/EM30	M30	4.80	71	31	23	29	230	255
XN1480H/EM36	M36	7.65	95	43	28	44	270	295

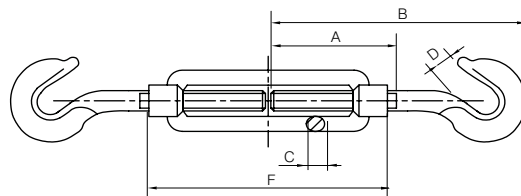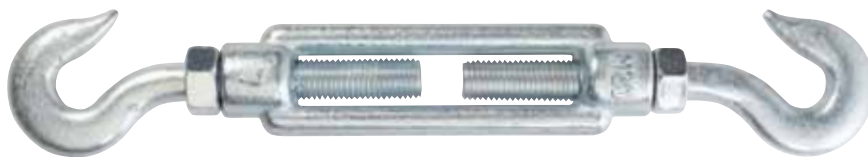

DIN1480 Hook/Hook Turnbuckles


Galvanised, Complete with Fitted Lock Nuts

Part Code	Size	Weight (kg each)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)
XN1480H/HM05	M5	0.05	35	62	5	7	70
XN1480H/HM06	M6	0.09	55	87	6	8.5	110
XN1480H/HM08	M8	0.17	55	95	8	11	110
XN1480H/HM10	M10	0.29	63	118	9	13.5	125
XN1480H/HM12	M12	0.43	68	125	11	15.5	125
XN1480H/HM16	M16	0.92	85	164	14	20	10
XN1480H/HM20	M20	1.69	100	196	17	21.5	200
XN1480H/HM22	M22	2.17	110	214	19	26	220
XN1480H/HM24	M24	2.83	128	236	21	26	255
XN1480H/HM30	M30	4.80	12	264	23	29	255
XN1480H/HM36	M36	7.65	148	319	28	44	295

DIN580 Eyebolts

Galvanised.
Safety Factor 4:1

Part Code	Size	Weight (kg each)	WLL (T)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
XNEB580M06	M6	0.06	0.08	20	36	20	13	6	18	8
XNEB580M08	M8	0.06	0.14	20	36	20	13	6	18	8
XNEB580M10	M10	0.11	0.23	25	45	25	17	8	22.5	10
XNEB580M12	M12	0.18	0.34	30	54	30	20.5	10	26	12
XNEB580M16	M16	0.30	0.7	35	63	35	27	12	30.5	14
XNEB580M20	M20	0.46	1.2	40	72	40	30	14	35	16
XNEB580M24	M24	0.87	1.8	50	90	50	36	18	45	20
XNEB580M30	M30	1.70	3.6	65	108	60	45	22	55	24
XNEB580M42	M42	4.10	7	85	144	80	63	30	75	32
XNEB580M48	M48	6.4	8.6	100	166	90	68	35	85	38
XNEB580M56	M56	8.6	11.5	110	184	100	78	38	95	42
XNEB580M64	M64	12.5	16	120	206	110	90	42	105	48

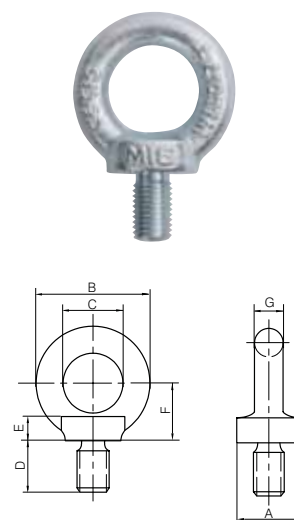

DIN582 Eyenuts

Galvanised.
Safety Factor 4:1

Part Code	Size	Weight (kg each)	WLL (T)	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	G (mm)
XNEN582M06	M6	0.05	0.08	20	36	20	8.5	18	8
XNEN582M08	M8	0.05	0.14	20	36	20	8.5	18	8
XNEN582M10	M10	0.09	0.23	25	45	25	10	22.5	10
XNEN582M12	M12	0.16	0.34	30	54	30	11	26	12
XNEN582M16	M16	0.25	0.7	35	63	35	13	30.5	14
XNEN582M20	M20	0.38	1.2	40	72	40	16	35	16
XNEN582M24	M24	0.72	1.8	50	90	50	20	45	20
XNEN582M30	M30	1.32	3.6	65	108	60	25	55	24
XNEN582M42	M42	3.10	7	85	144	80	35	75	32
XNEN582M48	M48	5.00	8.6	100	166	90	40	85	38



Pad Eyes


Deck Plates, Self Colour

Part Code	Size A (inch)	Weight (kg each)	Proof Load (T)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
XNPE10MM	3/8	0.14	2.0	20	25	45	6	38
XNPE12.5MM	1/2	0.33	3.5	25	35	60	8	50
XNPE16MM	5/8	0.53	5.5	32	45	70	10	64
XNPE19MM	3/4	0.77	7.5	38	50	85	12	76
XNPE22MM	7/8	1.27	9.6	42	60	102	13	89
XNPE26MM	1	2.00	13	50	70	115	16	100
XNPE28MM	1-1/8	2.90	15.75	57	76	130	18	114
XNPE32MM	1-1/4	3.44	20	64	85	145	19	128
XNPE35MM	1-3/8	5.10	23.63	70	95	159	21	140
XNPE38MM	1-1/2	6.60	29	76	100	170	22	152
XNPE44MM	1-3/4	10.00	39	88	120	200	26	178
XNPE52MM	2	15.00	50	100	140	230	30	203



High Tensile Lifting Eyebolts


Grade 80
Safety Factor: 4:1



Part Code	Size	Weight (kg each)	WLL 0° (T)	WLL 90° (T)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
XN054-M06	M6	0.05	0.4	0.15	28	13	16	42	17
XN054-M08	M8	0.06	1	0.4	36	15	20	51	20
XN054-M10	M10	0.11	1	0.4	45	18	25	63	25
XN054-M12	M12	0.18	2	0.75	54	22	30	75	30
XN054-M16	M16	0.28	4	1.5	63	28	35	88	35
XN054-M20	M20	0.45	6	2.3	73	30	40	101	40
XN054-M24	M24	0.87	8	3.2	90	38	50	128	50
XN054-M30	M30	1.66	12	4.5	108	45	60	154	60
XN054-M36	M36	2.65	16	7	126	55	70	183	70
XN054-M42	M42	4.03	24	9	144	65	80	212	85
XN054-M48	M48	6.38	32	12	166	70	90	238	100

High Tensile Lifting Eyenuts


Grade 80
Safety Factor: 4:1



Part Code	Size	Weight (kg each)	WLL 0° (T)	WLL 90° (T)	A (mm)	C (mm)	D (mm)
XN055-M06	M6	0.05	0.4	0.15	36	20	36
XN055-M08	M8	0.05	1	0.4	36	20	36
XN055-M10	M10	0.09	1	0.4	45	25	45
XN055-M12	M12	0.16	2	0.75	54	30	53
XN055-M16	M16	0.24	4	1.5	63	35	62
XN055-M20	M20	0.36	6	2.3	72	40	71
XN055-M24	M24	0.72	8	3.2	90	50	90
XN055-M30	M30	1.32	12	4.5	108	60	109
XN055-M36	M36	2.08	16	7	126	70	128
XN055-M42	M42	3.11	24	9	144	80	147
XN055-M48	M48	5.02	32	12	166	90	168

Pivoting Lifting Eyebolts


Grade 80
Safety Factor: 4:1



Part Code	Size	Weight (kg each)	WLL (T)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	M (mm)	N (mm)	G (mm)
XN173-M08	M8	0.30	0.3	35	50.5	6	30	13	45	46	10.4	14
XN173-M10	M10	0.38	0.6	35	50.5	6	30	17	45	52	15.4	35
XN173-M12	M12	0.86	1.0	40	48	8	36	19	68	62	18	18
XN173-M16	M16	0.90	1.5	40	48	8	36	19	68	70	24	18
XN173- M20	M20	1.85	2.5	54	74	12	50	30	83	88	30	16
XN173- M24	M24	1.95	4.0	54	88	14	50	36	83	95	37	18
XN173-M30	M30	4.40	5.0	73	106	17	68	41	120	132	48	27
XN173-M36	M36	7.50	8.0	73	106	17	68	41	120	142	54	27
XN173-M42	M42	13.50	15.0	104	155	24	95	65	176	179	63	40
XN173-M48	M48	14.20	20.0	104	155	24	95	65	176	194	74	40

Swivel Lifting Eyebolts with Ring

Grade 80
Safety Factor: 4:1

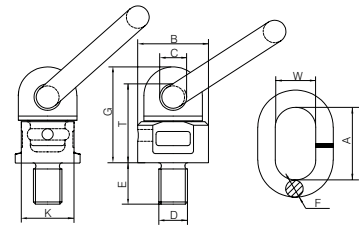

Part Code	Size	Weight (kg each)	DxE	WLL 0° (T)	WLL 90° (T)	B (mm)	C (mm)	G (mm)	T (mm)	A (mm)	W (mm)	F (mm)	K (mm)
XN303-M08	M8	0.41	M8X13	0.3	0.6	36	16.5	51	41	55	30	14	30
XN303-M10	M10	0.47	M10X18	0.45	0.9	36	16.5	51	41	55	30	14	30
XN303-M12	M12	0.44	M12X18	0.5	1	36	16.5	51	41	55	30	14	30
XN303-M16	M16	0.50	M16X20	1.12	2	36	16.5	52	42	55	30	14	30
XN303-M20	M20	0.96	M20X30	2.0	4	49.5	19	68	56	70	35	16	41
XN303-M24	M24	1.47	M24X30	3.15	6.3	57	22	78	65.5	85	40	18	46
XN303-M26	M27	1.97	M27X35	3.15	6.3	57	22	78	65.5	85	40	20	46
XN303-M30	M30	3.57	M30X35	8	11.8	80	28	112	92	115	50	22	64
XN303-M36	M36	3.60	M36X50	8	11.8	80	27	109	89.5	115	50	22	65
XN303-M42	M42	3.95	M42X60	10	15	80	27	109	89.5	115	50	25	65
XN303-M48	M48	4.02	M48X110	10	15	80	27	109	89.5	115	50	25	65

Snap Hooks

Galvanised


Part Code	Size (mm)	Weight (kg per 100)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)
XNGSH04x40	4x40	0.80	4	20	40	7	7
XNGSH05x50	5x50	1.50	5	25	50	8	7
XNGSH06x60	6x60	2.60	6	30	60	9	8
XNGSH07x70	7x70	4.10	7	35	70	10	8
XNGSH08x80	8x80	6.00	8	40	80	12	9
XNGSH09x90	9x90	9.00	9	45	90	12	10
XNGSH10x100	10x100	12.00	10	50	100	15	11
XNGSH11x120	11x120	18.40	11	57	120	18	16
XNGSH12x140	12x140	25.00	12	67	140	20	19
XNGSH13x160	13x160	34.00	13	74	160	22	25
XNGSH14x180	14x180	44.50	14	86	180	22	35



Snap Hooks with Eyelet

Galvanised


Part Code	Size (mm)	Weight (kg per 100)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)
XNGSHE04x40	4x40	0.90	4	20	40	5	7
XNGSHE05x50	5x50	2.00	5	25	50	5	7
XNGSHE06x60	6x60	3.00	6	30	60	5	8
XNGSHE07x70	7x70	5.00	7	35	70	7	8
XNGSHE08x80	8x80	7.50	8	40	80	10	9
XNGSHE09x90	9x90	9.80	9	45	90	10	10
XNGSHE10x100	10x100	13.50	10	50	100	13	11
XNGSHE11x120	11x120	21.00	11	57	120	13	16
XNGSHE12x140	12x140	27.50	12	67	140	15	19
XNGSHE13x160	13x160	40.00	13	74	160	17	25
XNGSHE14x180	14x180	48.50	14	86	180	17	35

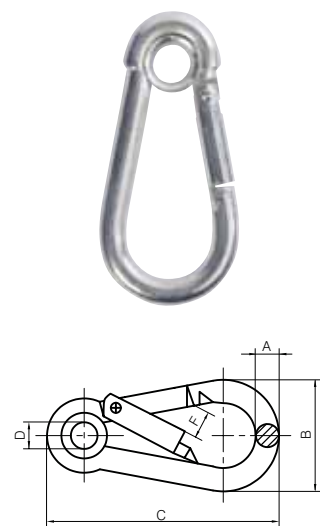


Snap Hooks with Eyelet & Screw Gate

Galvanised

Part Code	Size (mm)	Weight (kg per 100)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)
XNGSGE05x50	5x50	2.10	5	25	50	5	7
XNGSGE06x60	6x60	3.20	6	30	60	5	8
XNGSGE07x70	7x70	5.00	7	35	70	7	8
XNGSGE08x80	8x80	7.70	8	40	80	10	9
XNGSGE09x90	9x90	9.90	9	45	90	10	10
XNGSGE10x100	10x100	16.20	10	50	100	13	11
XNGSGE11x120	11x120	22.00	11	57	120	13	16
XNGSGE12x140	12x140	28.50	12	67	140	15	19
XNGSGE13x160	13x160	42.00	13	74	160	17	25

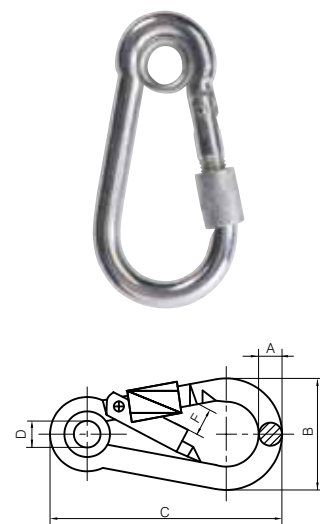




Standard Quick Links

Galvanised


Part Code	Weight (kg per 100)	Size A (mm)	B (mm)	C (mm)	F (mm)
XNGQL03.5MM	0.80	3.5	36.5	17	5
XNGQL05MM	2.00	5	49	23	6.5
XNGQL06MM	3.10	6	58	26.5	7.5
XNGQL08MM	7.30	8	75	33.5	10.5
XNGQL09MM	10.00	9	82	35	11.5
XNGQL10MM	12.40	10	90	40.5	12.5
XNGQL12MM	25.00	12	107	47.5	14.5
XNGQL16MM	53.00	16	125	54.5	17



Wide Jaw Quick Links

Galvanised


Part Code	Weight (kg per 100)	Size A (mm)	B (mm)	C (mm)	F (mm)
XNGWQL03.5MM	1.02	3.5	47	17	10
XNGWQL05MM	2.44	5	62	23	14
XNGWQL06MM	3.79	6	72	26.5	16
XNGWQL08MM	8.50	8	90	33.5	18



Delta Links

Galvanised

Part Code	Weight (kg per 100)	Size A (mm)	B (mm)	C (mm)	F (mm)
XNGDL03.5MM	0.95	3.5	37	31	5
XNGDL05MM	2.28	5	47	40	6
XNGDL06MM	3.65	6	56	47	7.5
XNGDL08MM	8.38	8	73	56	10
XNGDL10MM	14.75	10	87	66	12
XNGDL12MM	23.40	12	104	75	15



Repair Lap Link


Galvanised

Part Code	Weight (kg per 100)	Size A (mm)	B (mm)	C (mm)
XNGRLL04MM	0.70	4	20	8
XNGRLL05MM	1.30	5	23	10
XNGRLL06MM	2.20	6	29	11
XNGRLL08MM	4.70	8	37	15
XNGRLL10MM	9.50	10	38	17

S Hooks

Galvanised

Part Code	Weight (kg per 100)	Size A (mm)	L (mm)	F (mm)
XNGHS03MM	0.29	3	25	3
XNGHS04MM	0.73	4	35	4.5
XNGHS05MM	1.06	5	45	6.5
XNGHS06MM	2.27	6	55	7
XNGHS07MM	4.66	7	65	8
XNGHS08MM	6.75	8	75	10
XNGHS10MM	12.60	10	105	11
XNGHS12MM	15.00	12	120	13.5

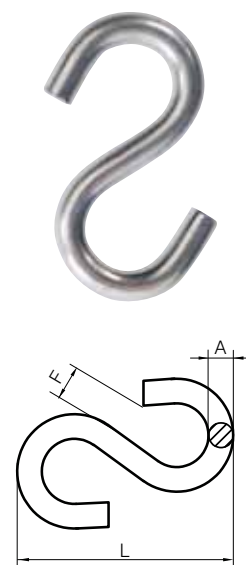

Simplex Hooks

Galvanised

Part Code	Weight (kg per 100)	Size (mm)
XNGSH025MM	0.14	25
XNGSH030MM	0.16	30
XNGSH040MM	0.33	40
XNGSH050MM	0.55	50
XNGSH060MM	0.81	60
XNGSH070MM	1.42	70
XNGSH080MM	1.85	80





Simplex Swivel Hooks

Galvanised

Part Code	Weight (kg per 100)	Size (mm)
XNGSSH025MM	0.38	25
XNGSSH030MM	0.38	30
XNGSSH040MM	0.59	40
XNGSSH050MM	0.93	50
XNGSSH060MM	1.25	60
XNGSSH070MM	2.13	70
XNGSSH080MM	2.95	80
XNGSSH090MM	4.24	90





Hair Spring Pin



Galvanised

Part Code	Weight (kg per 100)	Size A (mm)	B (mm)	C (mm)	F (mm)
XNGHP02MM	0.22	2	50	25	10
XNGHP03MM	0.70	3	60	28	18
XNGHP04MM	1.65	4	60	30	20
XNGHP05MM	2.70	5	85	40	24
XNGHP06MM	4.80	6	105	50	30
XNGHP07MM	7.10	7	105	50	30
XNGHP08MM	8.30	8	110	55	30

Hair Spring Pin with Eyelet

Galvanised

Part Code	Weight (kg per 100)	Size A (mm)	B (mm)	C (mm)	F (mm)
XNGHPE02MM	0.33	2	50	25	10
XNGHPE03MM	1.24	3	62	32	18
XNGHPE04MM	2.44	4	78	44	20
XNGHPE05MM	4.88	5	92	50	24
XNGHPE06MM	8.82	6	120	70	30
XNGHPE07MM	10.34	7	130	72	30
XNGHPE08MM	16.00	8	130	76	30



Lynch Pins

Galvanised

Part Code	Weight (kg per 100)	Size A (mm)	B (mm)	C (mm)	D (mm)
XNGLP04.5MM	1.20	4.5	30	2	22
XNGLP05MM	1.50	5	40	2.5	24
XNGLP06MM	2.40	6	45	3	25
XNGLP08MM	2.90	8	45	3.5	34
XNGLP09MM	4.00	9	46	3.5	34
XNGLP10MM	4.50	10	46	3.5	34
XNGLP11MM	5.00	11	46	3.5	34


Welded Round Ring

Galvanised

Part Code	Weight (kg per 100)	Size (mm)	A (mm)	L (mm)
XNGRRW04MM	0.85	4x25	4	25
XNGRRW05MM	2.50	5x50	5	50
XNGRRW06MM	3.10	6x40	6	40
XNGRRW07MM	3.70	7x35	7	35
XNGRRW08MM	6.80	8x50	8	50
XNGRRW10MM	11.10	10x50	10	50

US Alloy Type Eye Hoist Hook


Complete with lock nut fitted latch
Safety Factor: 5:1



Part Code	Weight (kg each)	WLL (T)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
XN130-01	0.21	0.75	16.5	19	17	72	16	97
XN130-02	0.28	1	19	22	19	82	16	110
XN130-03	0.4	1.5	23	23	21	93.5	17.5	125
XN130-04	0.65	2	28	24	26	103	21	140.5
XN130-05	0.81	3	31	27.5	28	119	23	162
XN130-06	1.75	5	39	33	37	146	30	201
XN130-07	3.77	7	51	40	46.5	186.5	38	256
XN130-08	6.8	11	62	51	57	213.5	46	317
XN130-09	9.96	15	73	57	70	260	55	360
XN130-10	15.37	22	89	75	76	318	68.5	434
XN130-11	27.2	30	90	82	91	360	70	495.5

US Alloy Type Swivel Hoist Hook

Complete with lock nut fitted latch
Safety Factor: 5:1



Part Code	Weight (kg each)	WLL (T)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
XN132-01	0.3	0.75	31.5	17	22.5	9	110	137	15
XN132-02	0.34	1	32	17	22.5	9	108.3	137	16
XN132-03	0.57	1.5	37.5	22.5	29.5	12	133.5	163.5	16
XN132-04	1.02	2	42.5	26	33	15.8	150.5	192	17.5
XN132-05	1.24	3	42.5	26	33	15.8	163	209	23
XN132-06	2.25	5	48	32.5	39	18	191	246	31
XN132-07	4.66	7	64	43	53	25	243.5	313	34
XN132-08	7.4	11	70	49.5	53	28.5	277	364	41.5
XN132-09	10.6	15	79	54.5	62	32	332	431	55.7
XN132-10	21.4	22	105	81	108	40	427	543	70
XN132-11	32	30	105	100	96	40	465.3	596	76.2

Never Exceed Working Load Limit


Spare Latch for XN130 & XN132



Part Code	Description
XN130-LK01	Spare Latch for XN130 & XN132 - 0.75T
XN130-LK02	Spare Latch for XN130 & XN132 - 15T
XN130-LK03	Spare Latch for XN130 & XN132 - 1.5T
XN130-LK04	Spare Latch for XN130 & XN132 - 2T
XN130-LK05	Spare Latch for XN130 & XN132 - 3T
XN130-LK06	Spare Latch for XN130 & XN132 - 5T
XN130-LK07	Spare Latch for XN130 & XN132 - 7T
XN130-LK08	Spare Latch for XN130 & XN132 - 11T
XN130-LK09	Spare Latch for XN130 & XN132 - 15T
XN130-LK10	Spare Latch for XN130 & XN132 - 22T
XN130-LK11	Spare Latch for XN130 & XN132 - 30T

Sliding Choker Hook for Ropes

Safety Factor: 5:1



Part Code	Size	Weight (kg each)	WLL (T)	D (mm)	A (mm)	B (mm)	E (mm)	L (mm)
XN072-01	3/8-1/2	0.68	1.6	17	50	71	21	132
XN072-02	5/8	1.21	2	22	63.5	79	23	151.5
XN072-03	3/4	1.99	3	28	69	103	29	170
XN072-04	1	4.18	5	32.5	85.7	135	38	213



Email:
enquiries@tysonsriggers.co.uk

